
YARDHEX™ — OUTDOOR SOIL SENSOR GUARD • INSTALLATION GUIDE (EN)

Compatible with ThirdReality Zigbee Smart Soil Moisture Sensor Gen 2 (Model 3RSM0147Z / 3RSM0347Z) • 4-Pack UV-Stabilized ASA Shield

STEP 1: Insert Soil Sensor

Push sensor straight down (90°) into moist soil until black probe is fully seated in the root zone.

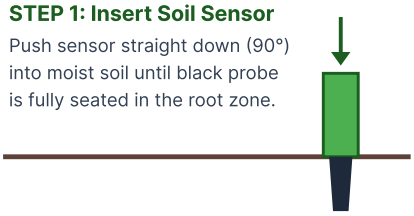


STEP 2: Align & Slide Guard

Place YARDHEX guard over sensor so the top cradle holds the head & stakes straddle the probe.



STEP 3: Press Stakes Flush

Press firmly on the flat top cap until both 4.13" stakes are buried & arch sits flush on soil.

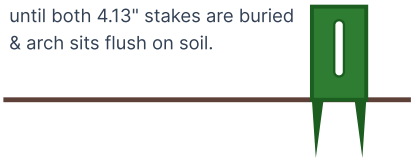

✓ Recommended Safe Zones

Flower Beds, Borders & Planters: Ideal for mulch beds, raised garden boxes, shrub borders, and fence lines. Shields against string trimmers (weed whackers), hose snags, pet footsteps, and sprinkler jets.

Dimensions: 8.27" H × 1.54" OD (210 × 39 mm) • 4.13" Shield / 4.13" Stakes

⚠ Where NOT to Install (Mower Hazard)

Open Lawn Turf (Below 4.5" Cut): The vertical shield stands 4.13" (105 mm) above ground. Do **not** install in open grass areas where push or ride-on lawnmowers pass directly overhead.

Material: Industrial UV-Stabilized Matte ASA (Heat-rated to 200°F / 93°C; Never Warps)

Pro Tips & Battery Care

Hard Clay Soil: Pre-water dry soil for 30 sec before pressing stakes in.

Battery Swap: Pull guard straight up to replace the AA battery, then press back into the same slots.

Wireless & Airflow: Vertical Vent Slot + 100% Zigbee 2.4 GHz Signal Safe


YARDHEX™ is a brand of North Texas Smart Living LLC (NTxSL.com) • Engineered & Manufactured in McKinney, TX, USA: Built with internal ribs that reinforce structure and ventilation for maximum durability. Need support or replacement parts? Message us via your Amazon Order page or visit **NTxSL.com**.

YARDHEX™ — PROTECTOR DE SENSOR DE SUELO • GUÍA DE INSTALACIÓN (ES)

Compatible con Sensor de Humedad de Suelo ThirdReality Zigbee Gen 2 (Modelo 3RSM0147Z / 3RSM0347Z) • Pack de 4 en ASA con Filtro UV

PASO 1: Clavar el Sensor

Inserte el sensor a 90° vertical en tierra húmeda cubriendo la sonda negra en la zona de raíz.

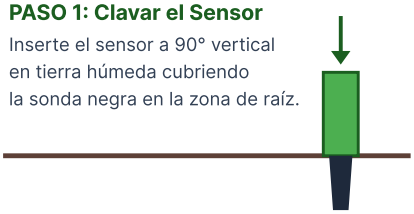


PASO 2: Alinear el Protector

Calce el escudo YARDHEX sobre el cabezal del sensor con las 2 estacas a ambos lados.



PASO 3: Presionar al Ras

Presione firme la tapa superior hasta enterrar las estacas de 4.13" y apoyar el arco al ras.

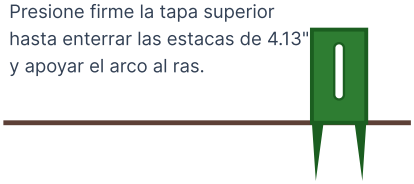

✓ Zonas Seguras Recomendadas

Canteros, Bordes y Macetas: Ideal para jardines con mantillo (mulch), huertas elevadas, bordes de arbustos y cercos. Protege contra desbrozadoras de hilo (weed whackers), mangueras, mascotas y aspersores.

Medidas: 8.27" Alto × 1.54" Diám. (210 × 39 mm) • 4.13" Escudo / 4.13" Estacas

⚠ Dónde NO Instalar (Cortadoras)

Césped Abierto (Corte menor a 4.5"): El escudo sobresale 4.13" (105 mm) del suelo. **No** lo instale en medio del pasto abierto por donde pasen cortadoras de césped o tractores por encima.

Material: ASA Mate Industrial con Filtro UV (Soporta hasta 200°F / 93°C sin deformarse)

Consejos y Batería

Suelo Arcilloso Duro: Moje la tierra 30 seg antes de clavar las estacas.

Cambio de Pila: Tire del tubo hacia arriba para cambiar la pila AA y vuelva a calzarlo.

Señal y Aire: Ranura vertical de ventilación + 100% Compatible con Señal Zigbee 2.4 GHz

YARDHEX™ es una marca de North Texas Smart Living LLC (NTxSL.com) • Diseñado y Fabricado en McKinney, TX, EE. UU.: Construido con nervaduras internas que refuerzan la estructura y ventilación para máxima durabilidad. ¿Necesita soporte o repuestos? Escríbanos desde su pedido en Amazon o visite **NTxSL.com**.